


# TECHNICAL DATA TRIBUS



**REACTION TO FIRE**  
A1

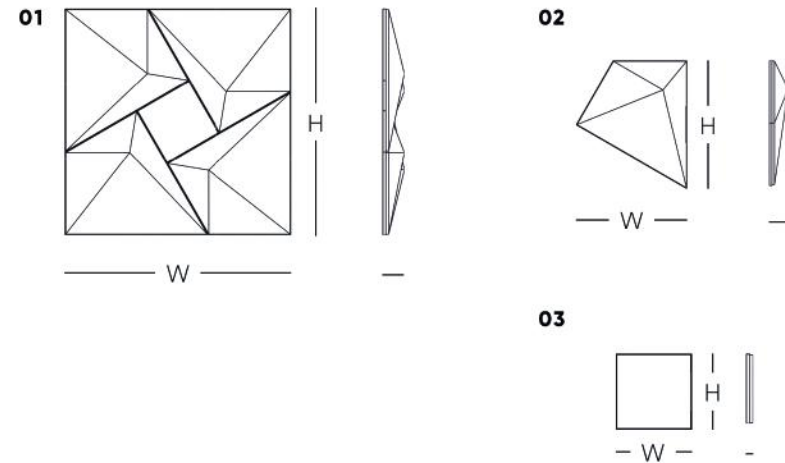

**ABSORPTION**  
W1



**FREEZE/THAW RESISTANCE**  
Resistant 97%



**COLOR FASTNESS**  
Unchanging



**COLOR TONE DIFFERENCE**  
V1



**THICKNESS**  
+/- 10%



**FLEXURAL STRENGTH**  
F1



**SURFACE QUALITY**  
A1



**THERMAL SHOCK RESISTANCE**  
Resistant 92%



**THERMAL CONDUCTIVITY**  
1,3 W/m²k



**SIZE ACCURACY**  
+/- 0,5%



**IMPACT RESISTANCE**  
5J



**ADHESION**  
Appropriate



| 01          | 02            | 03            |
|-------------|---------------|---------------|
| 32cm x 32cm | 17,5 x 20,3cm | 8,5cm x 8,5cm |

| ESPESOR |      |      |
|---------|------|------|
| 30mm    | 30mm | 10mm |

| UNIDADES      |             |             |
|---------------|-------------|-------------|
| 9,12 unidades | 38 unidades | 19 unidades |

| PESO PIEZA |       |       |
|------------|-------|-------|
| 3,8 kg     | 880gr | 140gr |

| PESO M² |        |       |
|---------|--------|-------|
| 36,10kg | 33,5kg | 2,7kg |

**COLORES**  
Carta RAL | Carta NCS | Metalizados

**ACABADOS DISPONIBLES**  
Mate | Brillo | Metalizado | Texturizado

**MATERIAL**  
Mineral Composite

**UBICACIÓN**  
Interior | Exterior